




LH-HTS-350

MAP Tray Sealer

DM-350 MAP Tray Sealer is widely applicable to the package of raw and cooked meat, seafood, dairy product, fruit and vegetable, rice and flour food. Modified atmosphere packaging machine features quality assurance, keeping fresh, color retention, complexion preservation and taste retention.

Die Plates Available Format(40mm Deep)

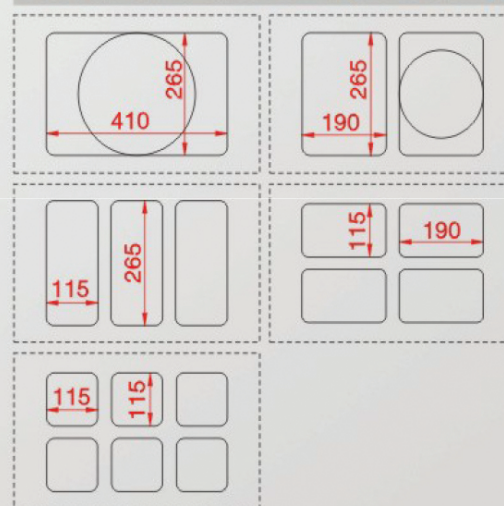


Technical Characters

1. OMRON PLC programmable control system.
2. OMRON Human-computer interface touch screen.
3. Fault alarm assures the easy operation.
4. SMC or FESTO pneumatic elements.
5. German BUSCH vacuum pump. (red pump is optional, special for high oxygen)
6. Air replacement is finished in the vacuum chamber.
7. Mix the gas online by German WITT gas mixer. (at buyer's option)
8. The mould of the tray can be moved in and out automatically.
9. The sealing mould can be changed. One machine is available for multiple different size trays.
10. 304 stainless steel construction, comply with hygiene for machine used in food industry.

Technology Specifications

Model	DM-350
Max Tray Dimension(mm)	440 × 265 × 80
Max Width Of Film(mm)	325
Max Diameter Of Film(mm)	260
Packaging Speed (times/min)	2-3
Electrical Requirement(v/hz)	380/50
Working Pressure(mpa)	0.6-0.8
Consume Power(kw)	3
Vacuum Pump(m ³ /h)	40
Air Filling Precision(%)	± 1
Air Exchanging Rate(%)	≥ 99
N. Weight(kg)	370
Machine Size(mm)	1050 × 960 × 1520

Die Plates Available Format(60mm-80mm Deep)

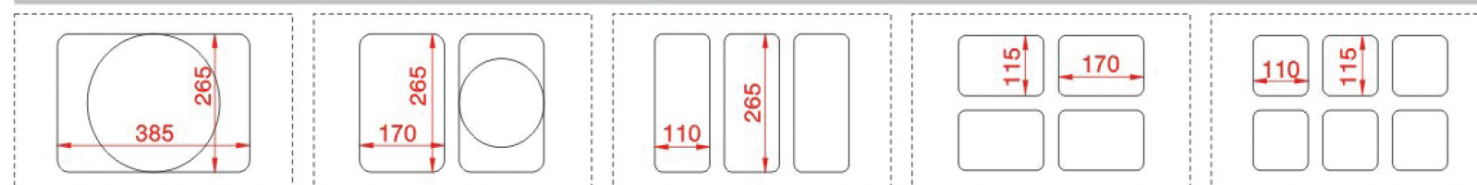

MAP TRAY SEALER

LH PACKAGING BV

Rijksweg 33a
NL - 6584 AA Molenhoek (lb)
The Netherlands

T +31 (0)24 - 3977590 F +31 (0)24 - 3972856
H www.lhpackaging.nl E info@lhpackaging.nl

Technical Characters

- 1.OMRON PLC programmable control system.
- 2.OMRON Human-computer interface touch screen.
- 3.Fault alarm assures the easy operation.
- 4.SMC or FESTO pneumatic elements.
- 5.German BUSCH vacuum pump. (red pump is optional, special for high oxygen)
- 6.Air replacement is finished in the vacuum chamber.
- 7.Mix the gas online by German WITT gas mixer.(at buyer's option)
- 8.The sealing mould can be changed. One machine is available for multiple different size trays.
- 9Automatic code tape printer. (at buyer's option)
- 10Automatic filling system. (at buyer's option)
- 11Automatic tray falling system. (at buyer's option)
- 12.Heavy-Duty moveable caster with brake assures machine moving safely.
- 13.304 stainless steel construction, comply with hygiene for machine used in food industry.



LH-ATS-410 Automatic MAP Tray Sealer

DL-410K MAP Tray Sealer is widely applicable to the package of raw and cooked meat, seafood, dairy product, fruit and vegetable, rice and flour food. Modified atmosphere packaging machine features quality assurance, keeping fresh, color retention, complexion preservation and taste retention.

Technology Specifications

Max Tray Dimension(mm)	450×225×80	Consume Power(kw)	7.5
Max Width Of Film(mm)	550	Vacuum Pump(m³/h)	100
Max Diameter Of Film(mm)	280	Air Filling Precision(%)	≤ ± 1
Packaging Speed (times/min)	3-5	Air Exchanging Rate(%)	≥ 99
Electrical Requirement(v/hz)	380/50	N. Weight(kg)	800
Working Pressure(mpa)	0.6-0.8	Machine Size(mm)	2800×1020×1520

Die Plates Available Format

